

# shindaiwa®

## NEW ZEALAND & SOUTH PACIFIC PRODUCT CATALOGUE



VERSION #1



# TRUST SHINDAIWA

## 5 YEAR DOMESTIC WARRANTY



5 years is a long time. Longer than you'll get from most of the equipment you buy. That's because we stand behind our products. We build professional-grade equipment and are proud of our engineering and manufacturing expertise. As a home owner, you want long-term dependability enjoyed by professionals, and a well-built product that you can buy with confidence.

## 2 YEAR PROFESSIONAL WARRANTY



Yes, you did read that right. You can have absolute confidence in our equipment. Shindaiwa is designed to be durable and to do what you ask it, wherever you take it. Not only that, our products are built to the highest standards of quality and performance. Our warranty is our statement of confidence and our badge of honour.

## 100% PROFESSIONAL GRADE



Shindaiwa only builds equipment to one standard – professional. We manufacture products to suit the environment in which they will be used and the job they will be doing, and each piece of equipment is as durable as we can make it. We test our products in punishing conditions to ensure that they are capable of whatever you demand from them. So even if you don't use Shindaiwa equipment professionally, the products you buy are already being used by people who do.

## JAPAN TECHNOLOGY



You know that equipment designed in Japan will be reliable. Well-built. Dependable. Professional. Durable. Japan is the home of technological craftsmanship and the nation has won international respect for its manufacturing expertise. This global standard also extends to the equipment we manufacture and we are proud to be counted among those companies that help Japan maintain its reputation for the quality of its engineering and technology.

# CHAIN SAWS



## 280Ts

Light weight, Top-handle pruning saw with proven performance and reliability.

Engine displacement: 26.9cm<sup>3</sup> // Output: 1.07kW / 1.46ps //  
Dry weight<sup>\*1</sup>: 3.0kg // Bar size: 20, 25, 30cm / 8, 10, 12in



## 34IAC

Ultra-light farm all-rounder chainsaw, featuring an auto-choke system. Perfect for limbing, firewood or smaller tree felling.

Engine displacement: 34.4cm<sup>3</sup> // Output: 1.51kW / 2.05ps //  
Dry weight<sup>\*1</sup>: 3.8kg // Bar size: 30, 35, 40cm / 12, 14, 16in



## 25IWs

Lightest professional petrol rear-handle chainsaw on the market. True versatility and maneuverability.

Engine displacement: 25.0cm<sup>3</sup> // Output: 1.12kW / 1.52ps //  
Dry weight<sup>\*1</sup>: 2.6kg // Bar size: 20, 25, 30cm / 8, 10, 12in



## 45Is

Powerful and very smooth farmer saw for intense tasks. Featuring many of Shindaiwa's "comfort" features as standard.

Engine displacement: 45.0cm<sup>3</sup> // Output: 2.3kW / 3.1ps //  
Dry weight<sup>\*1</sup>: 5.0kg //  
Bar size: 33, 38, 45, 50cm / 13, 15, 18, 20in



## 335s

Lightweight, easy-to-start petrol chainsaw built for farmers and private users. Ideal for light-duty tasks like firewood cutting and small tree felling.

Engine displacement: 34.4cm<sup>3</sup> // Output: 1.3kW / 1.77ps //  
Dry weight<sup>\*1</sup>: 3.7kg // Bar size: 30, 35cm / 12, 14in



## 50Isx

Powerful and light weight, professional saw that's ideal for felling.

Engine displacement: 50.2cm<sup>3</sup> // Output: 2.57kW / 3.5ps //  
Dry weight<sup>\*1</sup>: 4.7kg // Bar size: 40, 45, 50cm / 16, 18, 20in



\*1: Unit without guide bar, saw chain, chain oil and fuel.



### 60lsx

Heavy-duty, professional felling saw with outstanding torque.

Engine displacement: 59.8cm<sup>3</sup> // Output: 3.2kW / 4.4ps //  
 Dry weight<sup>1</sup>: 6.3kg // Bar size: 45, 50, 60cm / 18, 20, 24in



### 73lsx

Heavy-duty, professional felling saw with outstanding air filtration system and renowned for its dependability. Shindaiwa's most powerful chainsaw.

Engine displacement: 73.5cm<sup>3</sup> // Output: 4.1kW / 5.6ps //  
 Dry weight<sup>1</sup>: 6.7kg //  
 Bar size: 45, 50, 60, 70cm / 18, 20, 24, 28in



# TRIMMERS & BRUSHCUTTERS

## TRIMMER **CURVED SHAFT**



### F226S

Light weight curved shaft trimmer, built to increase maneuverability and efficiency in domestic and farm usage.

Engine displacement: 21.2cm<sup>3</sup> // Output: 0.7kW / 1.0ps // Dry weight<sup>\*1</sup>: 4.3kg



### T263XS

Professional, petrol trimmer / brushcutter with incredible combination of high power and low weight.

Engine displacement: 25.4cm<sup>3</sup> // Output: 1.0kW / 1.4ps // Dry weight<sup>\*1</sup>: 5.4kg



### T226S

Professional trimmer / brushcutter with light weight yet robust construction. Powerful and easy starting.

Engine displacement: 21.2cm<sup>3</sup> // Output: 0.7kW / 1.0ps // Dry weight<sup>\*1</sup>: 4.5kg



### T236TS

Professional loop-handle trimmer that's versatile and rugged.

Engine displacement: 21.2cm<sup>3</sup> // Output: 0.7kW / 1.0ps // Dry weight<sup>\*1</sup>: 5.1kg



### T303TS

Light weight, professional powerhouse with a high torque gear case.

Engine displacement: 30.5cm<sup>3</sup> // Output: 1.3kW / 1.8ps // Dry weight<sup>\*1</sup>: 5.9kg



\*1: Unit without fuel, cutting attachment, guard and harness.

 Model certified for CE
  Soft start
  Heavy duty air filter
  ANTI VIBE Super anti-vibration system
  U handle
  Loop handle



### C226S

Professional trimmer / brushcutter with light weight yet robust construction. Powerful and easy starting.

Engine displacement: 21.2cm<sup>3</sup> // Output: 0.7kW / 1.0ps // Dry weight<sup>1</sup>: 4.9kg



### B510S

Extremely powerful, professional clearing saw built to take on the biggest jobs out there.

Engine displacement: 50.2cm<sup>3</sup> // Output: 2.2kW / 2.9ps // Dry weight<sup>1</sup>: 9.1kg



### C303TS

Light weight, professional powerhouse with a high torque gear case.

Engine displacement: 30.5cm<sup>3</sup> // Output: 1.3kW / 1.8ps // Dry weight<sup>1</sup>: 6.0kg



### C361T

Industry leading high powered professional trimmer / brushcutter with a high torque gear case.

Engine displacement: 36.3cm<sup>3</sup> // Output: 1.4kW / 1.9ps // Dry weight<sup>1</sup>: 6.3kg



# HEDGE TRIMMERS **DOUBLE-SIDED**



## DH2325T-24

Professional double sided petrol hedge trimmer with anti-vibration, easy starting and rotatable handle.

Engine displacement: 21.2cm<sup>3</sup> // Output: 0.6kW / 0.8ps // Dry weight<sup>\*1</sup>: 5.0kg // Cutting length: 501mm



## DH1655T

Professional, light weight double-sided hedge trimmer with 639mm blade and rotating handle.

Engine displacement: 21.2cm<sup>3</sup> // Output: 0.6kW / 0.8ps // Dry weight<sup>\*1</sup>: 5.1kg // Cutting length: 639mm



## DH202

Light weight, professional double-sided hedge trimmer with 534mm blade suitable for medium sized jobs.

Engine displacement: 21.2cm<sup>3</sup> // Output: 0.6kW / 0.8ps // Dry weight<sup>\*1</sup>: 4.5kg // Cutting length: 534mm



## DH1855T

Professional, light weight hedge trimmer with long 744mm blade and rotating handle.

Engine displacement: 21.2cm<sup>3</sup> // Output: 0.6kW / 0.8ps // Dry weight<sup>\*1</sup>: 5.3kg // Cutting length: 744mm



## LONG REACH




## AH2365-LW

Light weight, professional long-reach articulating hedge trimmer.

Engine displacement: 21.2cm<sup>3</sup> // Output: 0.7kW / 1.0ps // Dry weight<sup>\*1</sup>: 6.2kg // Cutting length: 519mm // Overall length: 2407mm



Foldable arms

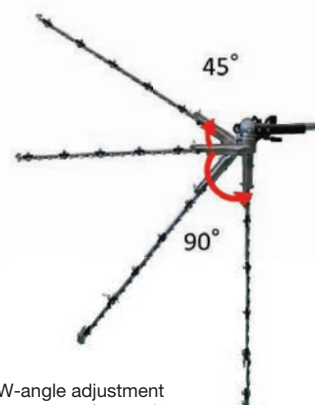

W-angle adjustment system works per 15 degrees with 10 positions.

\*1: Unit with specified cutting attachment, without fuel.


CE Model certified for CE



ANTI VIBE Super anti-vibration system



Adjustment cutter clearance




# POLE PRUNER



## PT262S

Powerful, light weight telescopic power pruner with ergonomic loop handle.

Engine displacement: 25.4cm<sup>3</sup> // Output: 1.0kW / 1.4ps // Dry weight\*<sup>1</sup>: 8.0kg // Overall length\*<sup>2</sup>: 2716-3704mm



\*1: Unit without guide bar, saw chain, chain oil and fuel. \*2 Unit with bar and chain.

# MULTI-TOOL SYSTEM

CE Model certified for CE  Soft start  Heavy duty air filter



3 CUTTER METAL BLADE AS OPTION.

**MTA-TB**  
Trimmer and brushcutter attachment.



**MTA-AHS-HD**  
Short shafted hedge trimmer attachment.



**MTA-AH-HD**  
Long shafted hedge trimmer attachment.



**MTA-PP/S**  
Pruner attachment.

**MTA-TC**  
Tiller/cultivator attachment.



**MTA-LE/S**  
Edger attachment.



**MTA-PS**  
Sweeper attachment.



## M262S

Engine displacement: 25.4cm<sup>3</sup> // Output: 1.0kW / 1.4ps // Dry weight\*1: 4.8kg // Length: 1039mm



**MTA-3EXT**  
3ft extension attachment.



**QUICK-CHANGE COUPLER**  
Quick-change coupler makes attachment transition quick and easy.

# BLOWERS & SHRED 'N' VAC



## EB252

Light weight, professional handheld blower, that's packed with power and features to increase productivity.

Engine displacement: 25.4cm<sup>3</sup> // Output: 0.9kW / 1.2ps //  
 Dry weight<sup>\*1</sup>: 3.9kg // Air volume<sup>\*2</sup>: 768m<sup>3</sup>/h //  
 Max. air speed<sup>\*2</sup>: 76.2m/sec



## EBS256S

Built around the concept of convenience and maximising your productivity. Blowing, vacuuming and shredding have never been so effortless.

Engine displacement: 25.4cm<sup>3</sup> // Output: 0.8kW / 1.1ps //  
 Dry weight<sup>\*3</sup>: 5.8kg // Air volume<sup>\*4</sup>: 600m<sup>3</sup>/h //  
 Max. air speed<sup>\*4</sup>: 84.9m/sec



## EB790RT

High-performance professional backpack blower designed for maximum comfort and balance. It includes an advanced shoulder and waist harness.

Engine displacement: 79.9cm<sup>3</sup> // Output: 3.5kW / 4.8ps //  
 Dry weight<sup>\*1</sup>: 11.8kg // Blowing air force<sup>\*2</sup>: 41.4N //  
 Air volume<sup>\*2</sup>: 1436m<sup>3</sup>/h // Max. air speed<sup>\*2</sup>: 108.9m/sec



## EB810

Ultra powerful professional backpack blower that provides 44.4N of blowing force. Shindaiwa's most powerful blower.

Engine displacement: 79.9cm<sup>3</sup> // Output: 4.2kW / 5.7ps //  
 Dry weight<sup>\*1</sup>: 12.0kg // Air volume<sup>\*2</sup>: 1819m<sup>3</sup>/h //  
 Max. air speed<sup>\*2</sup>: 94.5m/sec



\*1: Unit with blower pipes (standardised nozzle type A), without fuel. \*2: Unit with blower pipes (standardised nozzle type A). \*3: Unit with vacuum pipes, empty tank. \*4: Unit with blower pipes.

# ENGINE CUTTERS



## EC74IS

Extremely powerful, high torque engine cutter with incredible air filtration system. Blade not included.


Engine displacement: 73.5cm<sup>3</sup> // Output: 3.2kW / 4.4ps // Dry weight<sup>1</sup>: 10.3kg // Applicable blade diameter: 350mm




### HOW THE 4 STAGE FILTRATION SYSTEM WORKS




Dust separated by centrifugal effect from flywheel.



Dust is pushed outward in cyclone-stream chamber.



Dust goes up to the chamber.



Air goes down to the carburettor through the final filter.



Model certified for CE



Soft start



Heavy duty air filter



Automatic fast idle



## CWT-7410

Engine cutter cart for Shindaiwa EC741S.

Dry weight<sup>2</sup>: 29.5kg

### ENGINE CUTTERS

	EC741S
Engine displacement (cm <sup>3</sup> )	73.5
Output (kW / ps)	3.2 / 4.4
Dry weight <sup>1</sup> (kg)	10.3
Fuel tank capacity (mL)	700
Fuel consumption at maximum engine power (L/h)	2.1
Ignition system	CDI
Start-assist system	Soft start
Applicable blade diameter (mm / inch)	350 / -
Installable size of blade inner diameter (mm)	20
Warranty	5 year domestic + 2 year professional
Vibration Front handle / Rear handle (m/s <sup>2</sup> ) <sup>3</sup>	6.1/4.8
Sound pressure level (dB(A)) <sup>4</sup>	100.3
Sound power level(dB(A)) <sup>5</sup>	111.2

\*1: Unit without cutting blade and empty tanks.

\*2: Unit without engine cutter and empty water tank.

\*3: Measured in accordance with ISO 19432-1: 2020. Uncertainty (K)=1.1m/s<sup>2</sup>

\*4: Measured in accordance with ISO 19432-1: 2020. Uncertainty (K<sub>dB</sub>)=1.1dB(A)

\*5: Measured in accordance with ISO 19432-1: 2020. Uncertainty (K<sub>WdB</sub>)=1.3dB(A)



# ACCESSORIES



## SAFETY HELMET

Part# C6000340



## CHAIN SAW CHAPS

Part# C6000411

## SPEED-FEED®

Our patented revolutionary Speed-Feed trimmer heads take the hassle out of refilling your trimmer head and are the easiest loading tap-to-advance heads available. In fact the Speed-Feed reloads in under 30 seconds with just three easy steps, all without taking the head apart. SF400 is perfectly balanced for vibration free operation.

 Dia: 2.4mm (Max. 2.7mm)  
Length: 3.0m



## Speed-Feed 400

Part# SF400/S1

 Dia: 2.7mm (Max. 3.3mm)  
Length: 3.0m



## Speed-Feed 500

Part# SF500/S

## HARNESS



## ERGONOMIC HARNESS

Part# C062-000560



## ERGO PRO

Part# C062-000622



## HEAVY-DUTY FIXED LINE TRIMMER HEAD

Part# C6000410

# PRODUCT ICONS

## MODEL CERTIFIED FOR CE

Model certified for CE and RoHS compliant.

## AUTO CHOKE

Solenoid valve at carburetor controls amount of fuel depending on the engine temperature.

## SOFT START

Spring-assisted starting system for easier starting.

## ELECTRONIC CONTROL

Provides effortless starts and stable performance.

## HEAVY DUTY AIR FILTER

Heavy duty air filter for reduced maintenance and less downtime.

## SUPER ANTI-VIBRATION SYSTEM

Super anti-vibration system for reduced vibration.

## G-FORCE ENGINE AIR PRE-CLEANER™

G-FORCE Engine Air Pre-Cleaner for reduced air filter maintenance.

## SPIKE

Spike as standard.

ОПЦИОН

## OPTIONAL SPIKE

Spike as optional.

## AUTOMATIC FAST IDLE

Integrated choke and fast idle with trigger release for easy starting.

## SIDE ACCESS CHAIN TENSIONER

Side access chain tensioner for quick chain adjustments.

## U HANDLE

Model with U type handle.

## LOOP HANDLE

Model with loop type handle.

## HIGH TORQUE

High torque gear for more efficient work.

## ROTATABLE HANDLE

Rotatable rear handle for comfortable operation in all positions.

## ADJUSTABLE CUTTER CLEARANCE

Cutter clearance is adjustable.

## ADJUSTMENT-FREE

Cutter clearance is adjustment-free.

## TIP GUARD

Tip guard prevents blade contact with fences or buildings.

## POSI-LOC PIPE SYSTEM

Posi-loc for a secure connection.

## EZ-LOCK SYSTEM

EZ lock for secure pipe-to-housing connection.

## VENTILATED BACK PAD

Ventilated back pad for operator cooling.

## ROTATIONAL CONTROL

Delivers a pull away from the operator to counter the gyro effect, with no loss of blowing force.



DISTRIBUTED THROUGHOUT NEW ZEALAND & SOUTH PACIFIC BY



[camaproducts.co.nz](http://camaproducts.co.nz)

